

## Thermal Control

### SCI1000-G

Thermal Cycler Gradient


### SCI1000-S

Thermal Cycler


The SCIOLOGEX SCI1000-S and New SCIOLOGEX SCI1000-G gradient Thermal Cyclers deliver high performance, high throughput with easy programming via the color touch screen display. Excellent temperature uniformity and high speed ramping rates with outstanding heat conductivity.

#### Features

- Reliable heating/cooling elements and precise temperature control
- Unique design of block ensures the temperature uniformity and repeatable results
- 7 inch Large color touch panel screen for easy programming with user friendly software
- High performance DSP and temperature control
- Fast heating and cooling rate
- Large user program storage

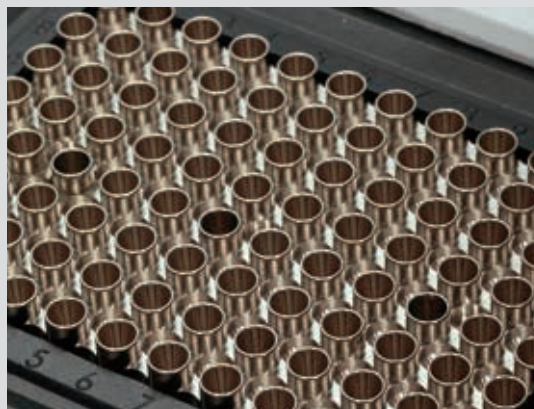

# Thermal Control



Excellent temperature uniformity



Gradient function (not available in the USA)



LCD touch panel



Excellent temperature accuracy



## Specifications

	SCI1000-G	SCI1000-S
Sample Capacity	96X0.2mL PCR tube, 8X12 PCR plate or 96 well plate	96X0.2mL PCR tube, 8X12 PCR plate or 96 well plate
Heating Temperature Range	4-105°C	4-105°C
Lid Temperature Range	30-110°C	30-110°C
Temperature Display Accuracy	±0.1°C	±0.1°C
Temperature Control Accuracy [at 55°C]	±0.3°C	±0.3°C
Temperature uniformity[at 55°C]	<0.3°C	<0.3°C
Max. Heating/Cooling Rate	3°C/Sec	3°C/Sec
Gradient Temperature Setting Range	30-99°C	-
Gradient Range	1-42°C	-
Adapter block material	aluminum	aluminum
Display	7" LCD 800x480	7" LCD 800x480
Input	Touch panel	Touch panel
User defined file system	Max. 30 segments 99 cycles max. 16 folder and 16 files each folder	Max. 30 segments 99 cycle max. 16 folder and 16 files each folder
Power off protection	Yes	Yes
Power Supply	100-120V/200-240V,50/60Hz	100-120V/200-240V,50/60Hz
Dimension[WxDxH]	280x370x250 mm	280x370x250 mm
Weight	11kg	11kg